


WG5000

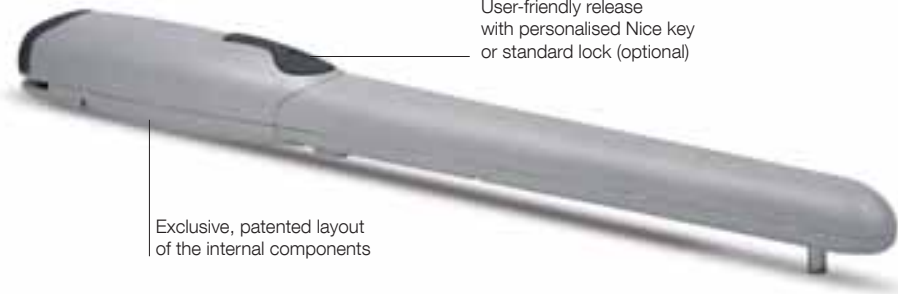

User-friendly release with personalised Nice key or standard lock (optional)

Exclusive, patented layout of the internal components

**For swing gates with leaves up to 3.5 m, surface mounted.**

**Reliable and silent:**

patented layout of internal parts, fewer moving parts.

**Easy to install:** after the gear motor has been assembled, all electrical connections are made from above.

**Built-in capacitor.**

**User-friendly release** with personalised Nice key or standard lock (optional).

**Pre-assembled,** travel stops PLA13 on opening.

**A60 control unit** for two 230 Vac motors with electronic clutch and slowdown, IP55 casing.

FLO2R-S



A60



MOF



MOSE



MLT



PLA13 TS



**The kit contains:**

**WG5000** 2 surface-mounted electromechanical gear motors, with Nice key release.  
**FLO2R-S** 1 transmitter 433.92 MHz, 2 channels. **A60** 1 control unit A60 with SMX1 plug-in receiver.  
**MOF** 1 pair of photocells for outdoor installation. **MOSE** 1 key selector switch for outdoor installation.  
**MLT** 1 flashing light with integrated aerial. **PLA13** 2 travel stops for opening manoeuvres. **TS** 1 signboard.

Code	Description	Pack/pallet
WINGO5KCE	Kit for swing gates with leaves up to 3.5 m, surface mounted	12


**N.B.** The content of the package may vary: consult the retailer.


**Technical specifications**

Code	WG5000
<b>Electrical data</b>	
Power supply (Vac 50 Hz)*	230
Absorption (A)	1.5
Power (W)	200
<b>Performance data</b>	
Speed (m/s)	0.013
Force (N)	1700
Work cycle (cycles/hour)	30
<b>Dimensional and general data</b>	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	920x98x95 h
Weight (kg)	6

\*60 Hz version available on request.

**Utilisation limits**

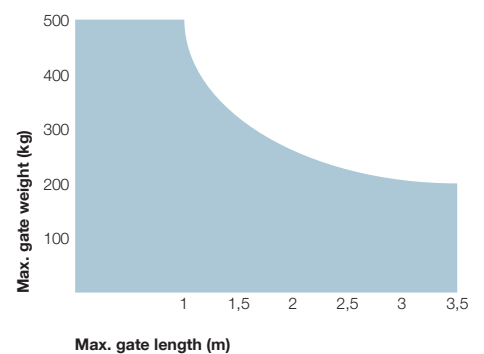

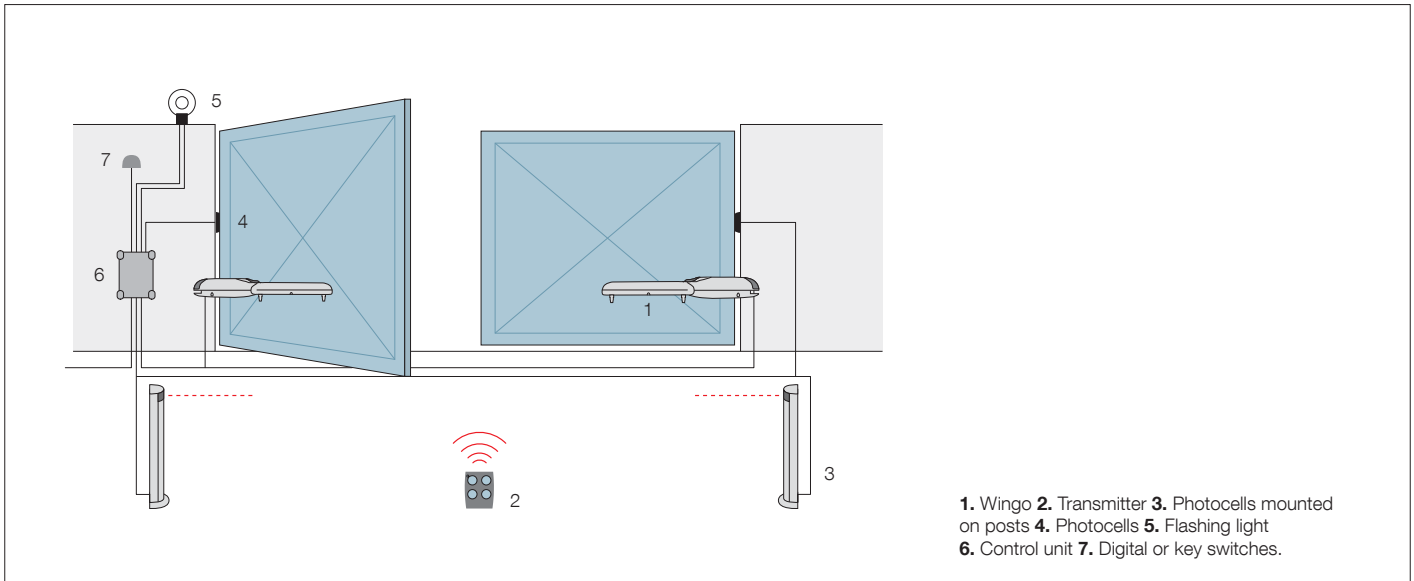

### Accessories



**PLA6**  
Rear bracket  
250 mm long.  
Pc/pack 1



**PLA8**  
Screw-adjustable  
front bracket.  
Pc/pack 1



**CM-B**  
Pawl with two metal  
release keys.



**PLA10**  
Vertical 12 V electric lock  
(required for gates longer  
than 3 m).  
Pc/pack 1



**PLA11**  
Horizontal 12 V electric lock  
(required for gates longer  
than 3 m).  
Pc/pack 1



**PLA13**  
Mechanical travel stops  
for closing and opening  
manoeuvres.  
Pc/pack 4

