

RD300



For sliding gates weighing up to 300 kg and up to 6 m length.

Practical: built-in control unit, can be connected by means of a simple connector and can be housed directly inside the motor; incorporated radio card, compatible with the Nice Flo and Smilo systems: 150 transmitters can be entered!

Advanced: the speed, strength and pause can all be adjusted.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light.

Safe: acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre.

FLO2R-S



MOF



MOSE



MLBT



TS



The kit contains:


RD300 1 irreversible electromechanical gear motor, 24 Vdc, with incorporated control unit and receiver.
FLO2R-S 1 transmitter 433.92 MHz, 2 channels. **MOF** 1 pair of photocells for outdoor installation.
MOSE 1 key selector switch for outdoor installation. **MLBT** 1 flashing light with integrated aerial.
TS 1 signboard.

Code	Description
RDKCE	Kit for the automation of sliding gates up to 300 kg and up to 6 m length, 24 Vdc, with incorporated control unit and receiver

N.B. The content of the package may vary: consult the retailer.

Technical specifications

Code	RD300
Electrical data	
Power supply (Vac 50/60 Hz)	230
Absorption (A)	1.1
Power (W)	210
Performance data	
Speed (m/s)	0.25
Force (N)	300
Work cycle (cycles/hour)	20
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	330x195x277 h
Weight (kg)	8

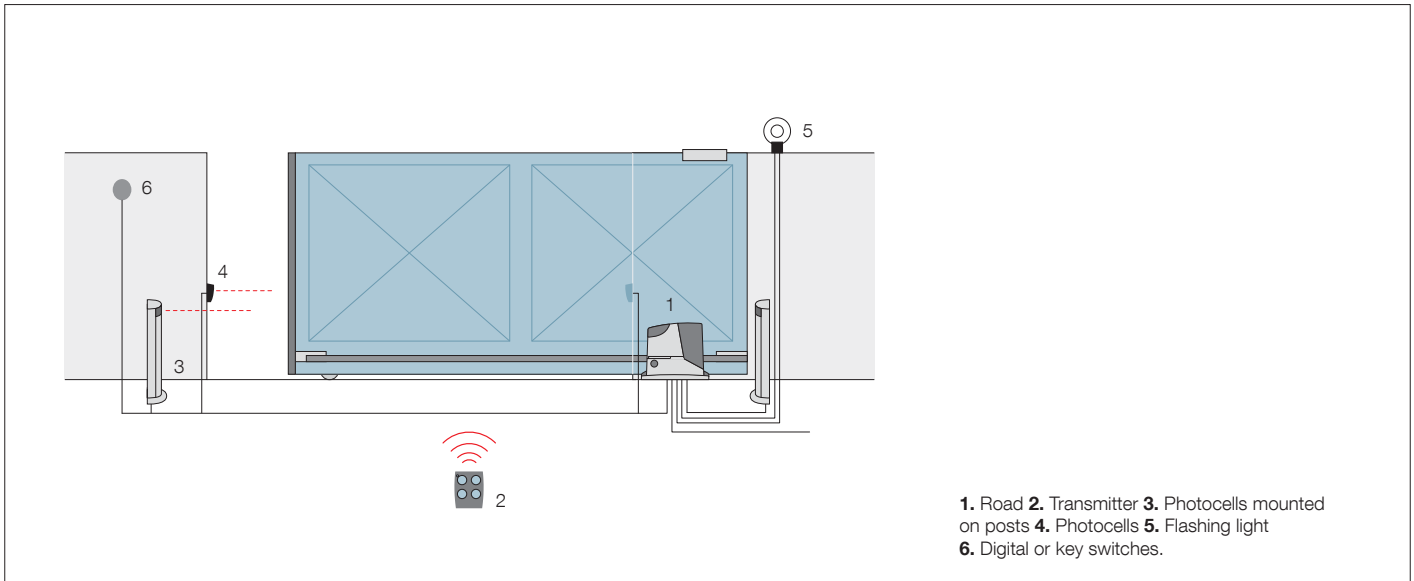

1. Road **2.** Transmitter **3.** Photocells mounted on posts **4.** Photocells **5.** Flashing light **6.** Digital or key switches.

Accessories



RBA4
Spare control unit for RDKCE.



CM-B
Pawl with two metal release keys.



LO5
Plastic rack 26x26x500 mm, for gates weighing up to 400 kg.
Pc/pack 10



ROA6
M4 25x20x1000 mm slotted nylon rack with metal insert for gates weighing up to 500 kg.
Pc/pack 10



ROA7
M4 rack, zinc coated, 22x22x1000 mm.
Pc/pack 10



ROA8
M4 rack, 30x8x1000 mm, zinc coated with spacers and screws.
Pc/pack 10

