
Nice WingoKit



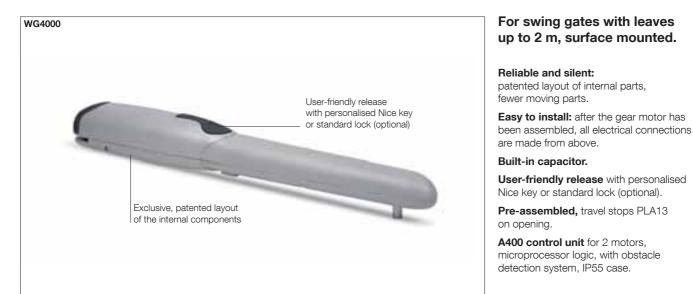

FLO2R-S A400 MOF MOSE MLT PLA13 TS

The kit contains:

WG4000 2 surface-mounted electromechanical gear motors, with Nice key release.
FLO2R-S 1 transmitter 433.92 MHz, 2 channels. A400 1 control unit A400 with SMXI plug-in receiver.
MOF 1 pair of photocells for outdoor installation. MOSE 1 key selector switch for outdoor installation.
MLT 1 flashing light with integrated aerial. PLA13 2 travel stops for opening manoeuvres. TS 1 signboard.

Code	Description	Pack/pallet
WINGOKCE	Kit for swing gates with leaves up to 2 m, surface mounted	12


 $\ensuremath{\text{N.B.}}$ The content of the package may vary: consult the retailer


Technical specifications

Code	WG4000
Electrical data	
Power supply (Vac 50 Hz)*	230
Absorption (A)	1.5
Power (W)	200
Performance data	
Speed (m/s)	0.016
Force (N)	1500
Work cycle (cycles/hour)	30
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	770x98x95 h
Weight (kg)	6

^{*60} Hz version available on request.

Utilisation limits



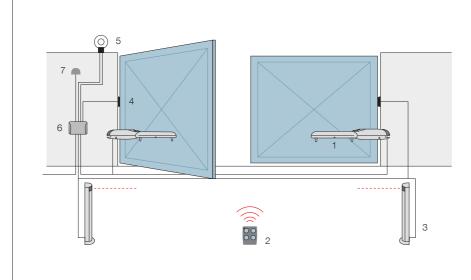

1. Wingo 2. Transmitter 3. Photocells mounted on posts **4.** Photocells **5.** Flashing light **6.** Control unit **7.** Digital or key switches.

Accessories



PLA14 Screw-adjustable rear bracket.

Pc/pack 2

Nice recommends customers order products in pallets in order to facilitate storage and delivery, and ensure packs are uniform. The number of packs per single pallet has been specified for this reason. Approximate draft,



PLA15 Screw-adjustable front bracket.

Pc/pack 2



CM-BPawl with two metal release keys.



PLA13Mechanical travel stops for closing and opening manoeuvres.

Pc/pack 4

